

# HISTOLOGY EQUIPMENT



TISSUE  
PROCESSORS

**ETP**  
**EFTP**



**INTELSINT**

ETP

## ETP



Fully enclosed, "state of the art" features, safe and highly reliable, the Intelsint ETP is the right answer for the day-by-day tissue processing needs of every Histology laboratory.

With a processing capacity of 360 specimens, three paraffin containers and an easy to operate HMI (Human Machine Interface) it sets itself at the top of the category.

Designed with specimens safety and operator ergonomics in mind, the ETP is also capable of performing in unfavorable environments.

Its fully automated RFD (Remote Fill and Drain) feature allows the user a safe, clean and easy reagents renewal.

Simple and economic service and maintenance is one of the benefit of Intelsint ETP

Code 906.003

EFTP

## EFTP


Fully enclosed, "state of the art" features, safe and highly reliable, the Intelsint EFTP is the right answer for the day-by-day tissue processing needs of every Histology laboratory.

**The EFTP is the fastest non-microwave tissue processor today available. Up to 450 biopsies can be safely processed in 45 minutes. This result can be achieved with traditional reagents or with most of the Xylene and Ethyl alcohol substitutes available on the market.**

The reagents heating is safely performed during filling into the sample processing chamber without any delay by a patented device called EHE (Enhanced Heat Exchanger). Only three reagents (plus fixation) are necessary to successfully and rapidly process biopsies. Every sample is evenly warmed at the desired temperature since the very beginning of each processing step. Any risk of overheating is avoided thanks to the special conformation and the multiple safety devices of the EHE.

Codice 906.004



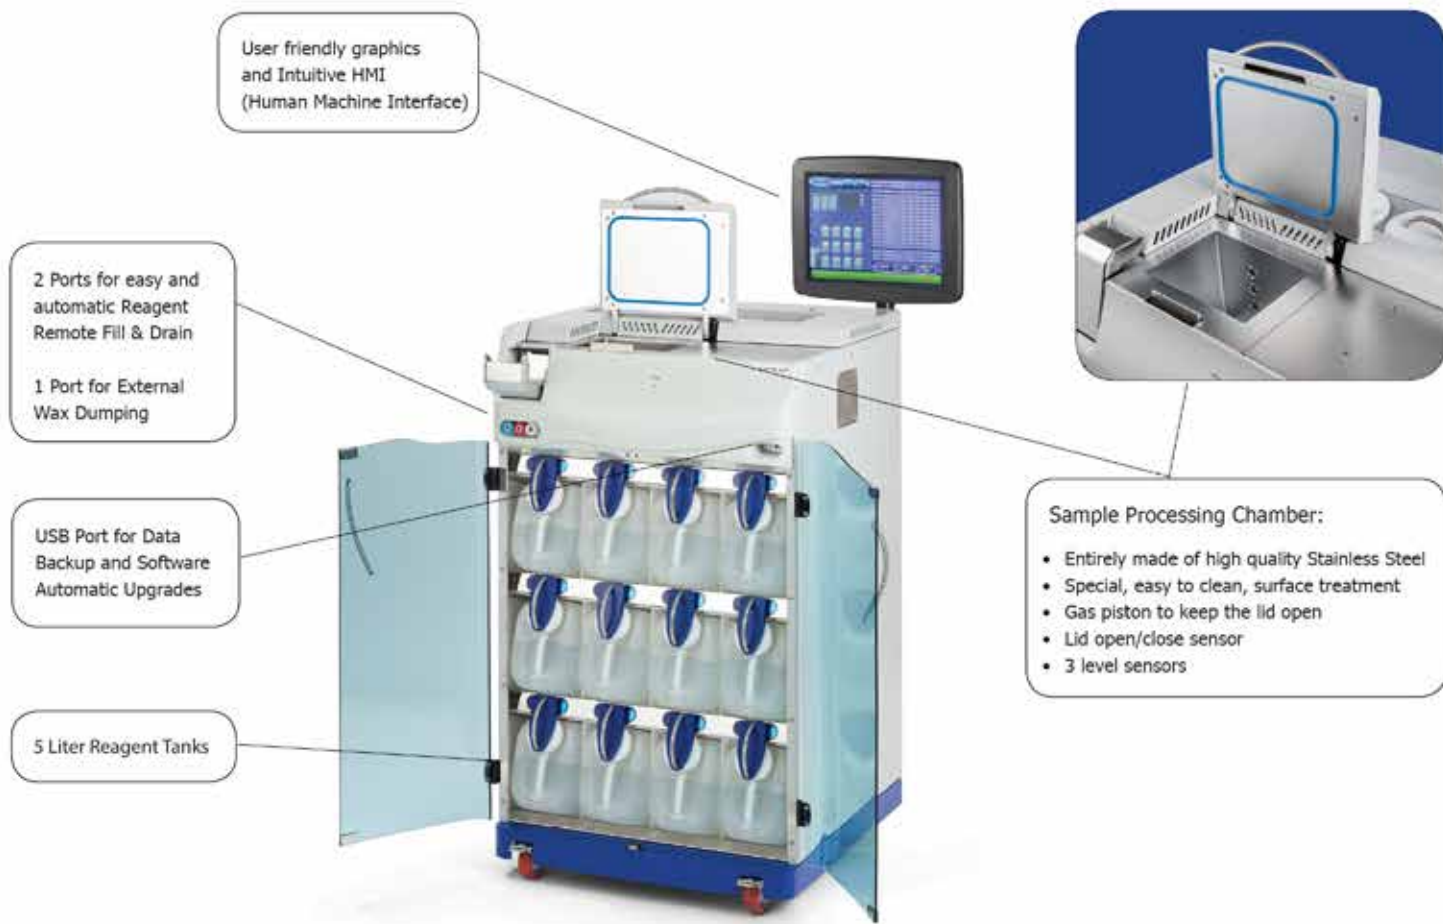

## Standard features

## Optional features

- ✔ Overnight Processing
- ✔ Fast Processing (microwave free) (EFTP)
- ✔ Reagent Management System (RMS)
- ✔ Remote Fill & Drain
- ✔ 450 samples capacity
- ✔ 15" Touch Screen Operation Control
- ✔ 3 Level Sensors
- ✔ Reagent Partial Load Capacity
- ✔ Wax Cleaning Cycle
- ✔ Data Backup on USB port
- ✔ 18 Process Programs
- ✔ Reverse Processing Special Program
- ✔ Process End Time Management
- ✔ Fume Control Charcoal Filter
- ✔ Operator management with customizable level of access
- ✔ Operator Login with barcode reader

- ✔ Backup system with external UPS
- ✔ Safeguard reagents management
- ✔ Data protection system with CPU-UPS
- ✔ Pre-filled reagents with bar-code reading on the tanks
- ✔ Identification of the baskets with barcode reader
- ✔ Connection with the L.I.S.
- ✔ Remote connection for service

Xylene free.  
All INTELSINT tissue processors can efficiently work with xylene and alcohol substitutes





## Process Editing

Simple  
Clear  
Easy  
Intuitive

18 Process available

Drag & Copy Function  
Copy Process Function  
Controlled Field Value

## Process Start and Run

Most Used Process Function  
Easy End of Process Setting

Graphic Process Controls  
Multi-language  
Reagent Level Check  
Partial Reagent Load  
Samples Baskets Check

Info Function to check 'at a glance' the most important instrument parameters

Reagent Quality Check



## Remote Fill & Drain

To change the reagents easily  
without removing tanks

Graphic RFD Control  
Reagent Quality Check  
Easy and Intuitive HMI  
RFD connected with RMS

Fast and Fully Automated

2 Ports for Reagents  
1 Port for Paraffin

## Pre-filled reagents management (optional)

This system allows you to define a specific set of reagents that must be used by the processor in combination with the RMS control system.

Reading and storing the bar-code on the tank.  
Unique 18-digit code.

Status of the reagents ( used or new reagent )  
always updated

Simple and guided replacement of reagents from  
the operator interface



## Tissue processor configuration



**ETP**  
Vacuum Tissue Processor  
360/450 samples  
(Code: 906.003)



**EFTP**  
Fast Tissue Processor  
360/450 samples  
(Code: 906.004)



**UPS1**  
UPS  
230V -1350W for ETP  
(Code: 3UP.S01)




**UPS2**  
UPS  
230V -1980W for EFTP  
(Code: 3UP.S02)



**BRSW**  
Barcode reader software  
(for reagent and/or basket identification)  
(Code: 906.060)



**BRG**  
Barcode reader gun  
(Code: 3BC.R01)



**ALIS**  
Connection with LIS system  
Dedalus Armonia  
(Code: 906.050)



OR



**OLIS**  
Connection with LIS system  
other companies  
(Code: 906.059)



**RSSW**  
Remote Service software Licence  
(Code: 906.061)



	ETP	EFTP	
Technical Specification	Sample Processing Capacity	360/450	
	Sample Baskets	3	
	Load Capacity for Histology Samples	450	
	SPC Level Sensors	3	
Protocols Features	EHE for Fast Processing	NO	YES
	Processing Programs	18	
	Preferred Programs with Quick Start	6	
	Purge Programs	4	
	Reverse Processing Special Program	1	
	Maximum time for each step	99 hh and 59 min	
	Start process for maximum delay	15 Days max	
	Process End Time/Date	User programmable	
Reagents	Processing Reagents	10 Tanks - 5 ltrs.	
	Process Chamber Washing Reagents	2 Tanks - 5 Lt.	
	Paraffin Containers	3 - 5 Lt.	
	Reagents Temperature Range	20 - 65 (°C)	
	Paraffin Temperature Range	55 - 65 (°C)	
	Precessing Pressures	600/1200 Hpa	
	RMS - Reagent Management System	YES	
	RFD - Remote Fill & Drain	YES	
	EWD - External Wax Dumping	YES	
	PWD - Protected Wax Dumping	YES	
	Vapor Removal	Charcoal Filter	
	Safe Reagents (optional with External UPS)	YES	
	Features HW & SW	Touch screen monitorColors LCD TFT - 15"	
		Available software languages	12
USB Ports (Data transfer, backup, Printer, UPS)		5	
Neetwork ports (Eterenet)		2	
Remote Alarm Port		YES	
External UPS (Optional)		1350 W	1820 C
Electrical data	Rating	115-230 Vac - 50/60 Hz	
	Installed power	1000 W	1500 W
Env. conditions	Temperature / Umidity	15 - 30 °C / 70% max	
	Maximum elevation	2500 mis	
Approvals	CE, CTUVus	UL 61010-1:2004 R10.08, IEC 61010-2-010:2003, IEC 61010-2-101:2002, CAN/CSA-C22.2 NO. 61010-1-04+G11_610-2-010-04_610.2.101-04	
Dimensions and weights	Dimensions (LxDxH)	680 x 700 x 1500 mm (with monitor)	
	Weight	198 Kg	226 Kg



## IMPORT AND TRAINING CENTER

2120 HWY. 19 NORTH  
 Thomaston, GA 30286  
 Phone 1-866 398-9478 Fax 1-706-243-4923  
[sales@pathologyserviceinc.com](mailto:sales@pathologyserviceinc.com)  
[www.pathologyserviceinc.com](http://www.pathologyserviceinc.com)

